


ROOF WALKWAY MATTING



AREAS OF USE

- Flat Roofs
- Interior/Exterior
- Retail
- Offices
- Restaurants
- Hospitality/Leisure
- Industrial

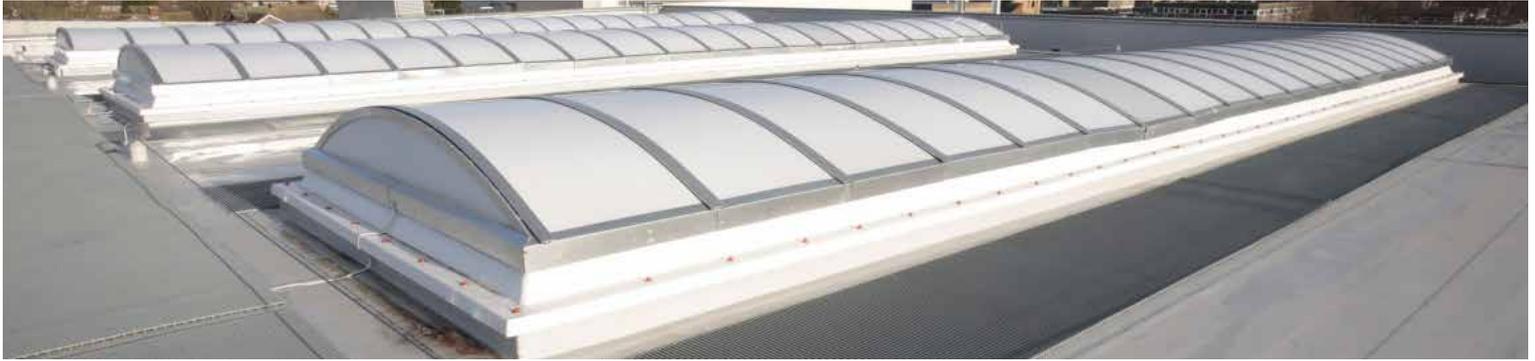

DESCRIPTION

Avoid damage to your roof membrane from foot traffic. Roof Walkway Matting elevates your walking surface 9/16" evenly distributing weight across thermo-welded PVC ribbing. It is specifically designed as a safe walkway for flat roofs in all weather conditions. Compatible with all roofing membranes. Simply lay it down and only reposition after extreme wind conditions. Its 9/16" height, anti-slip tread and open grid self draining system provides permanent slip resistance even in areas where water and snow may pool.

Not just for roofs! Roof Walkway Matting has an open grid, self draining system that provides increased safety in standing water conditions on both exterior and interior floors.

FEATURES



Diamond Cut Pattern Surface



Self Draining Open Grid Design



Made from Non-Porous UV Resistant PVC



Comes in 33' (10m) Roll in 2', 3', 3'3" and 4' Widths



5 Year Product Warranty

BENEFITS



Certified Slip Resistant
ASTM 1677: 0.6/0.6



Excellent Drainage
DIN 51130: V10



Resistant to Most Acids, Alkalines and Oil



Excellent Hygiene Easy to Clean



Seamless, Quick and Easy to Install

Standard Sizes:

Product	Roof Walkway Matting
Height	9/16" (14mm)
Standard roll options	33' x 2' (10 x 0.6m)
	33' x 3' (10 x 0.91m)
	33' x 4' (10 x 1.22m)
Weight	1.3 lb/sq.ft (6.6 kg/m2)

Tolerances:

	Height (+/- 0.05")	Length (0+1.0')	Width (+/- 1cm)
Roof Walkway Matting	9/16"	33'	2' 3' 4'

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils.
Composition	Flexible Polyvinyl Chloride (PVC)
Drainage	DIN 51130: V10
Environment	Roof Walkway Matting is 100% recyclable. When manufactured in black, it's made using our post industrial recycled material. The recycled content averages at least 30%, but we strive for 100% wherever possible. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Flammability	UL 94 HB Self Extinguished (material ignited but stopped burning prior to reaching the timing zone) / No Burn Rate. UL 214 self extinguished but did not reach the burn point.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments.
Slip Resistance	ASTM F 1677 - Dry/Wet: 1.0/0.9 DIN 51130: R10
Thermal	Designed to function at temperatures from -9°F and up to +140°F. Slight size variation may occur at temperature extremes.
UV light	Three years.
Wind Resistance	When loose laid, Roof Walkway Matting can withstand winds up to 60mph (96 km/h). In laboratory conditions, on a flat stable platform at The University Of Hertfordshire, School of Aerospace, Automotive & Design Engineering, Roof Walkway Matting remained stable in wind speeds up to 94mph (150 km/h).
Warranty	Two years.

Installation:

Roof Walkway Matting's one-piece construction means installation is simple:

- Loose lay, no fixing required
- Durable, one-piece construction
- Supplied in 33' rolls; simply cut to fit on site
- Contours to the roof structure

Cleaning:

Roof Walkway Matting looking good is easy:

- Simply roll or lift to clean
- Easy to clean with a high pressure hose

Colors:



Light Gray



Black



Yellow

tough & easy
watco industrial flooring

891 Auto Parts Place, Suite A-2 • Martinsburg, West Virginia 25403
Phone: 1.855.627.6350 Fax: 1.855.627.6351

www.watcofloors.com

©2022 Watco Industrial Flooring