


KENNEL MATTING



AREAS OF USE

- Animal Cages
- Veterinary Facilities
- Kennel Areas
- Zoo Clinics

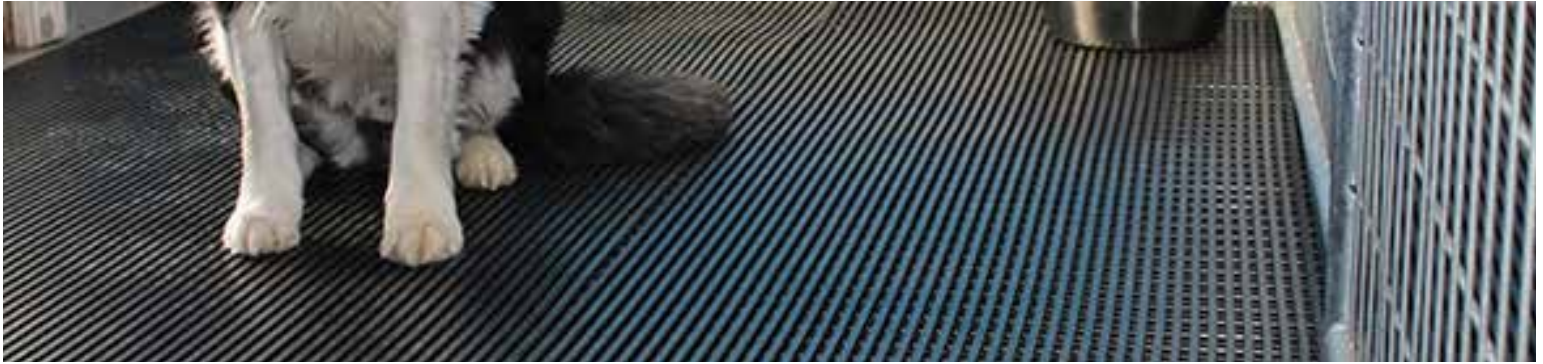

DESCRIPTION

Ideal for lining kennels, cages, and veterinary surgeries. Easy to cut material gives you the flexibility to contort in odd shaped cages. High quality animal matting for kennels, cages, and veterinary clinics. Made of flexible polyvinyl chloride (PVC) our matting is resistant to animal waste as well as most acids, cleaning agents, alkaline and oils, while also inhibiting the growth of bacteria. This flexible construction is easy to cut and shape on site. Supplied in a 4 foot roll, let the matting lay loose on the flooring surface to flatten before positioning to final resting place. Because of its ribbed technology liquids easily pass through to the below surface for an easier clean. Available in black and blue.

FEATURES



High Level Cushioning Surface Provides Extra Comfort



"D Shaped" Smooth Top Open Grid Design



Made from Non-Porous UV Resistant PVC



Comes in 33' (10m) by 48" (1.2m) Wide Roll



2 Year Product Warranty

BENEFITS



Ribbed Technology Provides Excellent Drainage



Resistant to Most Acids, Cleaning Agents, Alkalines and Oil



100% Virgin PVC Inhibits the Growth of Bacteria



Imperious to Animal Waste and Easy to Clean



Quick and Easy to Install

Standard Sizes:

Product	Kennel Matting
Height	17/32" (13.5mm)
Standard roll options	33' x 2' (10 x 0.6m)
	33' x 3' (10 x 0.91m)
	33' x 4' (10 x 1.22m)
Weight	1.4 lb/sq.ft (6.9 kg/m2)

Tolerances:

	Height (+/- 0.05")	Length (0+1.0')	Width (+/- 1cm)
Kennel Matting	17/32"	33'	2' 3' 4'

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils.
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Kennel Matting is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments.
Thermal	Designed to function at temperatures from -9°F and up to +140°F. Slight size variation may occur at temperature extremes.
UV light	Three years.
Warranty	Two years.

Installation:

Kennel Matting's one-piece construction means installation is simple:

- Comes in 33' rolls
- Easy to cut to fit on site
- Contours to uneven surfaces

Cleaning:

Keeping Kennel Matting looking good is easy:

- Light to handle
- Simply roll or lift to clean
- No special cleaning tools needed

Colors:



Blue



Black